

Model-Based Usability Evaluation and Analysis of Interactive Techniques

Jeff Ladry, Philippe Palanque, Eric Barboni & David Navarre
IRIT - University Paul Sabatier
118, route de Narbonne, 31062 Toulouse Cedex 9, France
{ladry, palanque, barboni, navarre}@irit.fr

ABSTRACT

This position paper presents a model based approach supporting development of advanced user interfaces for the design, simulation, tuning and the assessment of interaction techniques. It is based on a double concept: the introduction of additional information in models to allow designer to tune easily the interaction technique and the use of simulation and logging facilities to assess performance evaluation of the models. It proposes an alternative to user testing which is very difficult to setup and interpret when advanced interaction techniques are concerned.

Author Keywords

Model-Based approaches, formal description techniques, performance evaluation, multimodal interfaces, interactive software engineering, tuning.

INTRODUCTION

Using models for the design of computer systems provide a description of the system abstracted away from its implementation. Nowadays, such approaches are prominent in the area of software engineering via the Model Driven Engineering [9] field that emerged from the UML standard [11]. Indeed, as they provide a more abstract description of the system than the implementation code they also provide a unique opportunity for various stakeholders (users, developers...) to comment and propose modifications.

In The HCI community many researchers have described user interface elements by means of models. The interested reader can find a complete state of art of model-based user interface in [10] where the different modeling techniques are categorized by criteria such as: *Language, Interaction Coverage, Scalability, Tool support and Expressiveness*.

Beyond this descriptive aspect, models can also be used to support the evaluation of the user interface for properties (such as liveness and safety) or even for usability including: Model Based Usability remote evaluation as in RemUsine [13], EvaHelper [5], or in ReModel [5]. Similar work can also be found for the Web domain as in AWUSA [14]. Usability evaluation can also be found for more generic

Pre-proceedings of the 5th International Workshop on Model Driven Development of Advanced User Interfaces (MDDAUI 2010): Bridging between User Experience and UI Engineering, organized at the 28th ACM Conference on Human Factors in Computing Systems (CHI 2010), Atlanta, Georgia, USA, April 10, 2010.

Copyright © 2010 for the individual papers by the papers' authors. Copying permitted for private and academic purposes. Re-publication of material from this volume requires permission by the copyright owners. This volume is published by its editors.

purpose as in MeMo&MASP [6] or in [1] with MDA (Model-driven architecture)-compliant methods to improve software usability through model transformations.

Among these contributions, many have shown that HCI concerns must be integrated within the development process in order to design and develop usable systems. This is known as the "too little too late" problem detailed in [8] claiming that usability must be considered in the early stages of the development process or it will be only partially addressed.

Next section presents a model-based approach proposing an emphasis on *evolvability* and *modifiability* of models to be able to take into account usability concerns. The basic idea is to prepare models for modification at design time in order to be able to adjust them according to usability evaluation results.

THE APPROACH

This position paper proposes a design process for the design, simulation, tuning and assessment of interaction techniques.

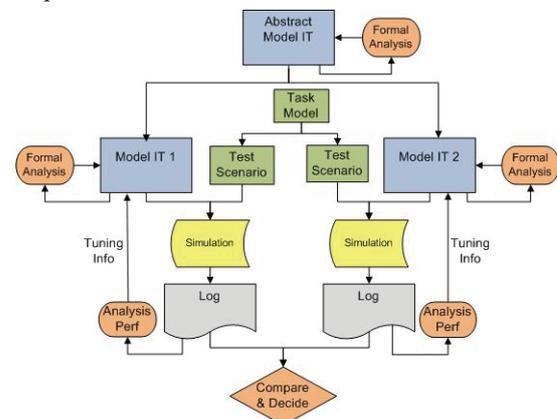


Figure 1 Process involving Interaction techniques, tasks models and Analysis +Log

Figure 1 presents the process of this approach exemplified for the comparison of two interaction techniques.

Modeling Interactions techniques

In the beginning of the process an abstract model (Abstract Model IT) is constructed using the ICO formalism [10] to accomplish the task represented in the Task model in CTT. From abstract model, multiple detailed models can be produced. These models refine the abstract model according

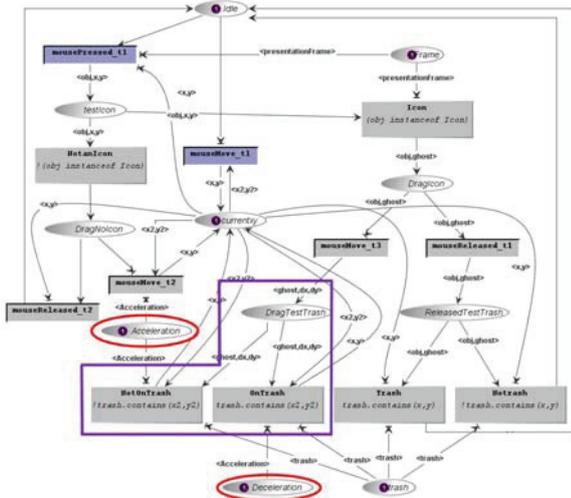


Figure 4 ICO model of tunable Drag & Drop interaction technique

The *Acceleration* place contained a value used for the acceleration of the mouse cursor when an object is dragged; The principle of the approach is to run simulations of the models to identify possible limitations and propose modifications to be made in the models to improve the efficiency of the interaction technique. After tuning a new simulation is performed and the results are compared to the desired properties.



Figure 5 User Interface of the case study

Next section sketches how this approach can be instantiated on a case study, presenting the models, the transformations and the results of the performance evaluation.

CASE STUDY

The objective of the case study is to present the various phases of the approach on a simple but realistic application (see Figure 5). In the application a set of icons are presented in a window on a grid. The user's goal is to remove all the icons on the user interface by doing, iteratively in any order, the selection of an icon and the triggering of a deletion command the selection and deletion of icons. To support this goal two different interaction techniques have been modeled. Following the terminology of Figure 1, Model IT1 (called Drag & Drop) features an interaction technique of type Drag and Drop and behaved as described in the previous section. Model IT2 (called Speak & Click) features a multimodal interaction technique involving speech recognition (for the deletion command) and gesture (for icon selection). Systems and tasks models related to

these two interaction techniques are presented in the next sections.

Modeling Interaction Technique 1

The behavior of IT 1 is presented in Figure 4. According to the more detailed description of the interaction technique, the abstract tasks to be refined as presented in Figure 6 in order to produced test scenarios (as presented in the design process of Figure 1). Selection is performed first by deciding the icon to be deleted then by moving the mouse cursor on the icon and by pressing the mouse button. Deletion is performed by moving the selected icon over the trash icon, verifying that trash icon is highlighted and releasing mouse button.

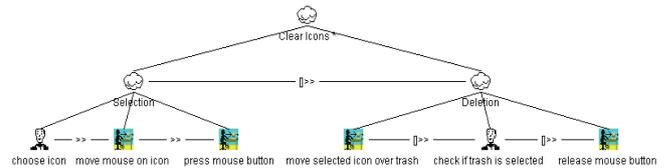


Figure 6 Task model refined to be conformant with Drag & Drop behavior

It is interesting to note that the temporal operator between tasks Deletion and Selection is *order independence*. The same imposed sequencing can be found in the ICO model where the model TI 1 (in Figure 4) imposes to start interaction with the selection (deletion is only available later on).

Modeling Interaction technique 2

Similarly to what has been done for Interaction technique 1, Interaction Technique 2 has been fully described using the ICO formalism and is presented on Figure 7.

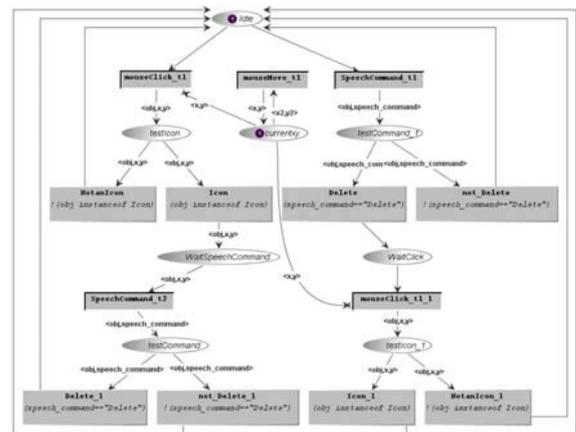


Figure 7 ICO model of system B (Speak & Click interaction technique)

This model allows users to either start by a speech command "delete" and then selecting an icon or selecting first an icon to be deleted and then uttering the word "delete". The abstract tasks model has to be refined similarly to the model in Figure 6.

Simulation

Simulation of the interaction technique models is done in the case tool Petshop. Further information about the case

tool can be found in [4] and about the simulation in. We don't provide here more information about the simulation as it has been introduced in [2] and is beyond the scope of this position paper.

Logging

From log extracted from the simulation of IT1 we can produce information such as the total time for a Drag&Drop. We can also compute the number of time the move change from *OnTrash* to *notOntrash* before the releasing to represents the number of time the user has missed the trash and exited the target without releasing on the icon. All such information comes only from the places and transitions that can thus easily be seen on the model represented in Figure 4 and the relationship with the log as presented in Figure 2 is immediate.

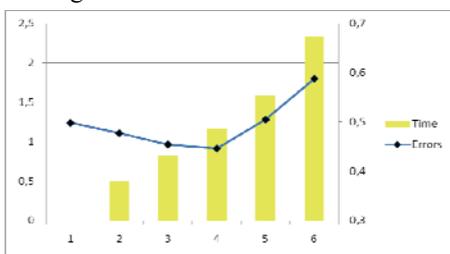


Figure 8 Result of Analysis of Log

After identifying where that information will be extracted from the model extract, we can simulate several time the model with different values and see if the total speed of the interaction technique and the number of errors to execute this task evolve. Such results can be gathered in a graph as presented in Figure 8. That graph shows that for an increase of acceleration of the mouse (Acceleration place in Figure 4), first the Drag&Drop is faster. But when the acceleration is 5, the errors are too important and the time to make the Drag&Drop increases and becomes worst than the standard interaction technique without acceleration

CONCLUSION

In this paper we have presented an approach to test and evaluate different interaction technique. This testing and evaluation is driven by models. With these models we can also tune finely different aspects of the interaction technique. This approach has exemplified on a small example where we show the interest of a model based usability evaluation. The results show well known results in HCI such as that acceleration improves efficiency of target selection to a certain extend. The objective of the approach is to apply it to novel and more sophisticated interaction techniques (possibly multimodal ones) which are much harder to assess especially through user testing.

REFERENCES

1. Abrahão S., Iborra E., and Vanderdonck J. 2007. Usability Evaluation of User Interfaces Generated with a Model-Driven Architecture Tool. In *Maturing Usability: Quality in Software, Interaction and Value*, Series: Springer Human-Computer Interaction Series, Vol. 10, E. Law, E. Hvannberg, and G. Cockton (Eds.), 610p., 2007, ISSN: 978-1-84628-940-8, Springer.
2. Bastide, R., Navarre, D., and Palanque, P. 2002. A model-based tool for interactive prototyping of highly interactive applications. In *CHI '02 Extended Abstracts on Human Factors in Computing Systems (Minneapolis, Minnesota, USA, April 20 - 25, 2002)*. CHI '02. ACM, New York, NY, pp. 516-517.
3. Balagtas-Fernandez F., Hußmann H., A Methodology and Framework to Simplify Usability Analysis of Mobile Applications In *Proceedings of the 24th IEEE/ACM International Conference on Automated Software Engineering (ASE 2009)*. Auckland New Zealand, November 2009, ISBN 1527-1366/09, pp. 520-524.
4. Blanch R., Guiard Y. and Beaudouin-Lafon M. Semantic Pointing: Improving Target Acquisition with Control-Display Ratio Adaptation. In *Proceedings of CHI 2004*, pages 519-526, Vienna - Austria, April 2004.
5. Buchholz G, Engel J, Martin C, Propp S. Model-based usability evaluation - evaluation of tool support. *HCI 2007*, Beijing, China, 2007. p. 1043-52. Springer-Verlag, Berlin, Germany, 0302-9743
6. Feuerstack, S., Blumendorf, M., Kern, M., Kruppa, M., Quade, M., Runge, M., and Albayrak, S. 2008. Automated Usability Evaluation during Model-Based Interactive System Development. In *Proceedings of the 2nd Conference on Human-Centered Software Engineering and 7th international Workshop on Task Models and Diagrams (Pisa, Italy, September 25 - 26, 2008)*. P. Forbrig and F. Paternò, Eds. Lecture Notes In Computer Science, vol. 5247. Springer-Verlag, Berlin, Heidelberg, 134-141.
7. Kristoffersen, S. 2009. A Preliminary Experiment of Checking Usability Principles with Formal Methods. In *Proceedings of the 2009 Second international Conferences on Advances in Computer-Human interactions (February 01 - 07, 2009)*. ACHI. IEEE Computer Society, Washington, DC, 261-270
8. Lim, K. Y. and Long, J. (1994). *The Muse Method for Usability Engineering*. Cambridge University Press.
9. Mellor S. and Balcer M. (2002). *Executable UML: A Foundation for Model-Driven Architectures*. Addison-Wesley Longman Publishing Co., Inc., Boston, MA, USA, 2002.
10. Navarre, D., Palanque, P., Ladry, J., and Barboni, E. 2009. ICOs: A model-based user interface description technique dedicated to interactive systems addressing usability, reliability and scalability. *ACM Trans. Comput.-Hum. Interact.* 16, 4 (Nov. 2009), 1-56.
11. Object Management Group (2003). *Unified Modelling Language (UML) 2.0 Superstructure Specification*, August 2003. Ptc/03-08-02, pp. 455-510
12. Paternò F., Mancini C., Meniconi S. ConcurTaskTrees: A Diagrammatic Notation for Specifying Task Models, *Proceedings of the IFIP TC13 International Conference on Human-Computer Interaction*, p.362-369, July 14-18, 1997
13. Paternò, F., Russino, A., Santoro, C. (2007) Remote evaluation of Mobile Applications, Task Models and Diagrams for User Interface Design 6th International Workshop, TAMODIA 2007, Toulouse, France, November 7-9, 2007, Lecture Notes in Computer Science, Vol. 4849, Winckler, Marco; Johnson, Hilary; Palanque, Philippe (Eds.) ISBN: 978-3-540-77221-7
14. T. Tiedtke, C. Martin, N. Gerth. Awusa, A tool for automated website usability analysis. 9th Int. Workshop DSVIS, 2002.